

PRAGMA
INNOVATIONS


SOME0



Quick Start Guide QSC®

1 Connecting SOME0

1.1 Swiss, UK and EU version

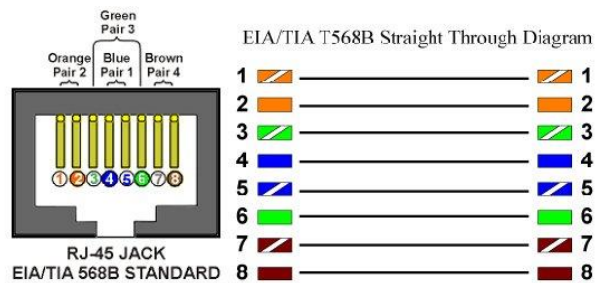

- o = Orange/White
- O = Orange
- g = Green/White
- B = Blue
- b = Blue/White
- G = Green
- br = Brown/White
- BR = Brown

1.2 Single gang version

Plug in the Ethernet cable into the RJ-45 socket on the back of the device.

2 Setup SOME0

2.1 Software Overview

Find SOME0 in network,
connect, identify and
disconnect.

Retrieve SOME0 settings.

Send settings to SOME0.

Amount of channels can be
defined here.

The desired QSC Named
Control IDs must be entered
in these two fields.

Pragma Innovations: SOME0 Setup Tool

SOME0 setup Network setup About

Find SOME0s in network

192.168.1.34 MAC: 00:80:A3:C4:7F:CD Search Connect Identify Disconnect

Get Firmware version

Firmware: SQSC=V1.1 Get

Please disconnect to close program or to change network settings!

SOME0 Setup

Get Settings Send Settings

Amount of Channels

8

Source Selector ID

Source1

Volume ID

Volume1

Channel Number

Channel Name
(only letters and numbers)

1	TUNER_1
2	TUNER_2
3	TUNER_3
4	SPOTIFY
5	YOUTUBE
6	AUX_1_
7	AUX_2_
8	STREAM_

3 | TUNER

Enter channel name.
(max seven letters/numbers)

2.2 Network Setup

Find SOMEO in network.

Assign new IP address to
your SOMEO.

Enter IP address of DSP that the
SOMEO shall communicate
with.


Retrieve SOMEO's pre-set DSP
IP address.

The screenshot displays the 'Pragma Innovations: SOMEO Setup Tool' window. The 'Network setup' tab is active. The interface includes the PRAGMA INNOVATIONS logo in the top right corner. The 'Find SOMEOs in network' section features a table with one entry: IP: 192.168.1.109, MAC: 00:80:A3:A4:D1:DA, and a 'Search' button. Below this, the 'Configure new IP Addresses' section contains two sub-sections: 'Set SOMEO IP' and 'Set DSP Network Information'. Each has an 'IP-Address' input field and a 'Set' button. To the right of these is a 'Get DSP Network Information' section with an 'IP-Address' input field and a 'Get' button. Blue arrows from the text on the left point to these specific UI elements: the first arrow points to the 'Find SOMEOs in network' table; the second points to the 'Set SOMEO IP' section; the third points to the 'Set DSP Network Information' section; and the fourth points to the 'Get DSP Network Information' section.


3 Setup DSP

3.1 Q-SYS Designer

1. Insert a Router with the amount of needed inputs (max. 8) into your design. Assign the Named Control ID programmed by the SOME0 software to the Router block.



2. For the volume control, insert a single Gain Block into the design and assign the same Named Control ID as entered in the SOME0 software.



3. Set the Gain Properties to Max Gain 6dB and Min Gain -65dB.

Properties	
Gain Properties	
Max Gain (dB)	6
Min Gain (dB)	-65