


REF : FMR 222 N & FMR 240

Professional symmetrical microphone cable - OFC

Ed. 4 05/07 SL

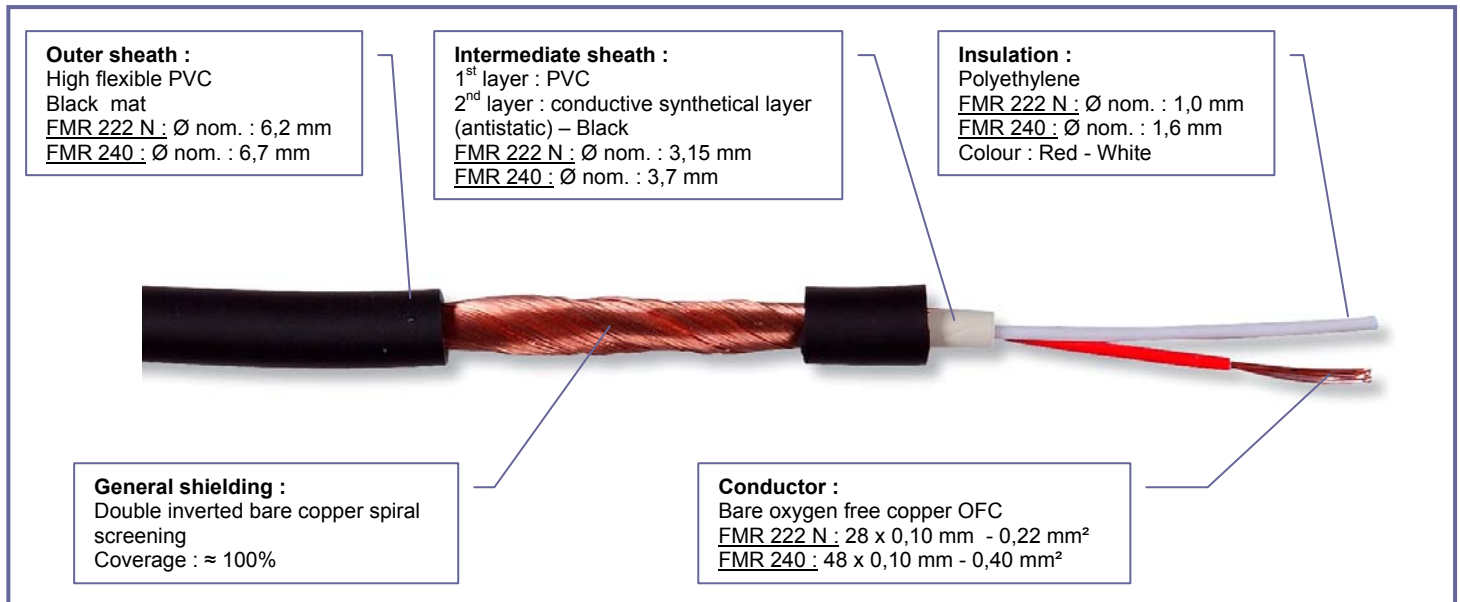

PRODUCTS INFORMATIONS

Application

Analogue balanced audio.
Microphone links, wiring for sound.
Professional sound studios, TV and radio.

Electrical properties

Max. voltage : **250 V**

Test voltage : **1000 V**

Inner conductor electrical resistance at 20°C :
FMR 222N : **85 Ω/km**
FMR 240 : **50 Ω/km**

Capacity (conductor/shielding) : **70 pF/m**

Characteristics

 Temperature range :
Fixed use : - 30°C → + 80°C
Mobile use : - 10°C → + 70°C

 Minimum bending radius :
5 x Ø

 Weight :
FMR 222 N : **50 kg/km**
FMR 240 : **65 kg/km**

 Conform to RoHS directive