


REF : DMX512

Lighting cable – 2 x 2 x 0,34 mm² - Grey PVC



Ed. 3 08/15 MC

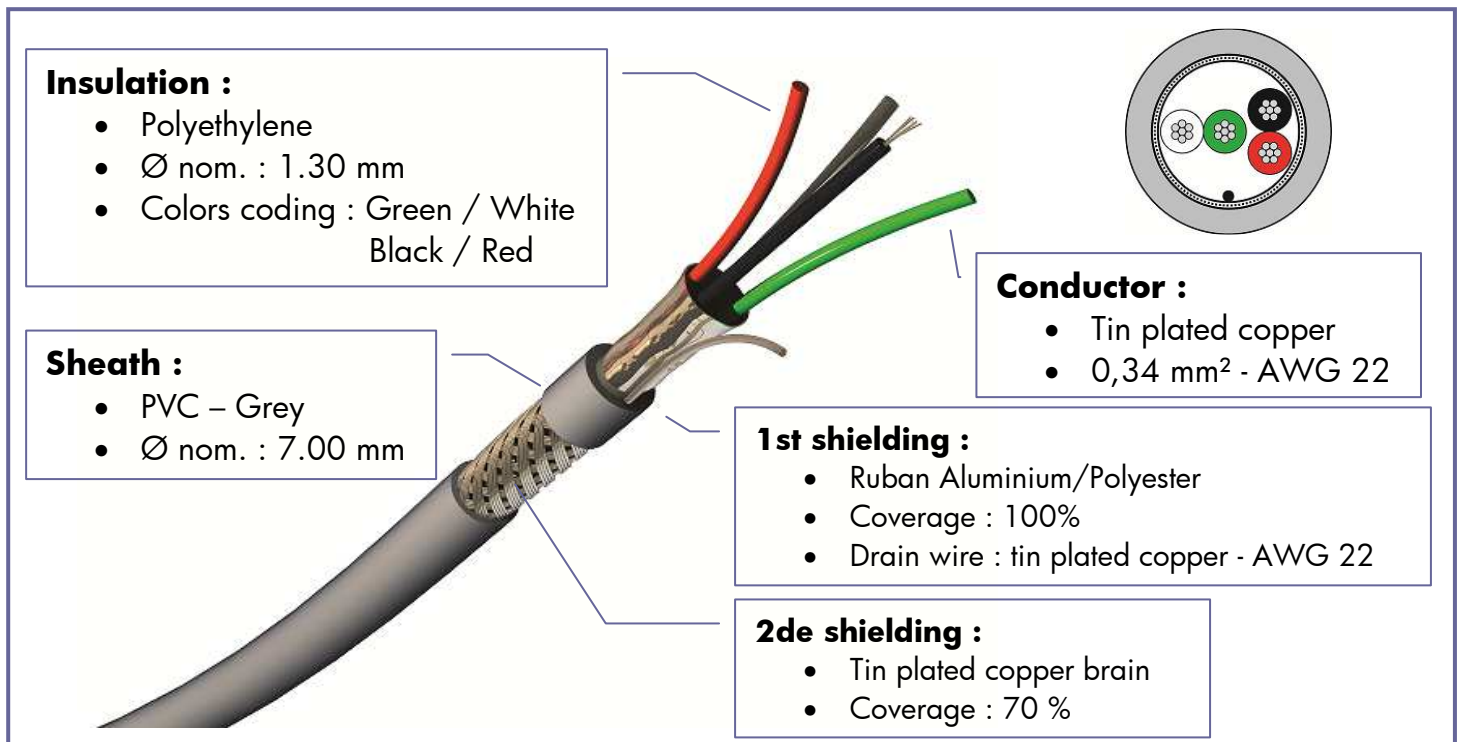

PRODUCT INFORMATIONS

Applications

- DMX signal and digital AES/EBU transmissions.
- Wiring in mobile and fixed applications.
- Digital transmissions over long distances.
- Very good protection against electrical interferences thanks to double

Electrical properties

- Max. voltage: **300 V**
- Test voltage :
 - Conductor / conductor : 1500 V
 - Conductor / shielding : 1000 V
- Impedance : **110 Ω**
- Electrical resistance at 20°C: **53 Ω/km**
- Insultation resistance at 20°C : > **500 MΩ.km**

REF : DMX512

Lighting cable – 2 x 2 x 0,34 mm² - Grey PVC



Ed. 3 08/15 MC

Caractéristiques



Flame retardant : **IEC 60332-1**



Temperature range : - **30°C** → + **70°C**







Minimum bending radius : Static : **35 mm**
Dynamic : **70 mm**



Conform to **RoHS** directive

Item nb

 REF.	Number of pairs	 mm ← ext.		 Kg/Km
DMX512	2	7.00 mm	1000 m	110.00