

PT-C-HDM

HDMI 2.0 Signal Management and Manipulation



Features


- ▶ 18Gbps (4K 60Hz 4:4:4) and HDCP 2.2 support
- ▶ Equipped with a range of EDID emulation settings for common HD and UHD resolutions as well as custom and pass through settings
- ▶ HDCP handling via simple dip switch for robust handshake connections
- ▶ Unique CEC on/off switch for secure system integration and reliability
- ▶ Supports auto downscaling from 4K to 1080p for perfect video reproduction on legacy hardware

Technical Data
PT-C-HDM

Input / Output	
Input	1x HDMI-A
Output	1x HDMI-A
Technical Data	
Max. Resolution	4K 60Hz 4:4:4
Bandwidth	18Gbps
HDMI Standard	HDMI 2.0 / HDCP 2.2
General	
Product Dimensions	54 x 18 x 60mm
Product Weight	85g
Housing Material	Steel
Colour	Black
DIP Switch	"EDID" and "HDCP" and "CEC" control
Operation Temperature	0~ 40°C
Storage Temperature	-10~ 55°C
Relative Humidity	10% ~ 90%
Power Supply	DC 5V / 1A
Power Consumption	Max. 2.4W

Product Overview

Art. No.	EAN
PT-C-HDM	4251364738825

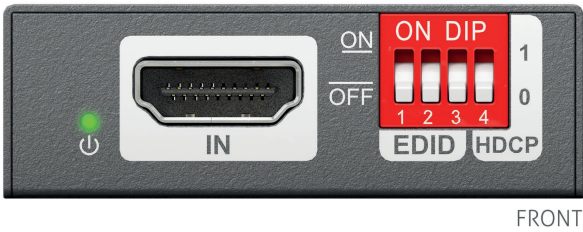

Contact

PureLink GmbH
Von-Liebig-Str. 10
48432 Rheine | Germany

+49 5971 800 299-0
+49 5971 800 299-99
info@purelink.de

We regularly expand our product range. We will be happy to provide information on updates in this regard upon request.
All information is subject to confirmation and non-binding. Technical changes, printing errors and mistakes excepted.
The illustrations used in this document may differ from the delivered product.

