
HDBaseT[™] Patch Cable



Cat.6A S/FTP UltraFlex

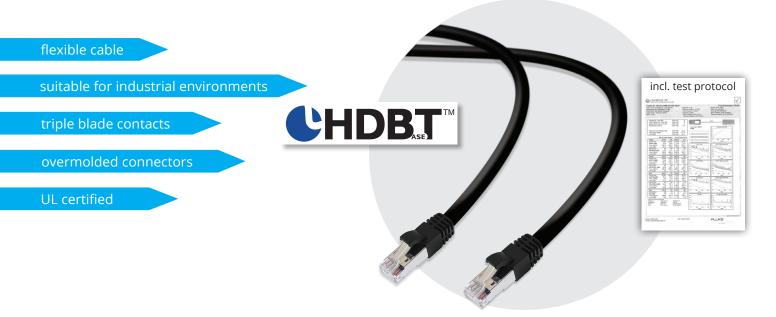

TTLan[®] HDBaseT[™] 5Play[™] Cat.6A S/FTP Patch Cable

The TTLan[®] HDBaseT[™] 5Play[™] patch cable ensures excellent transmission quality for short and long transmission distances from 0.5 to 30 meters - even with high-resolution 4K image quality.

The patch cable allows fast and direct connection of the HDBaseT hardware. The RJ45 connectors are fitted with specially designed triple blade contacts. In combination with the rigid inner conductor of the cable, they ensure a reliable connection.

The overmold of the connectors ensures a firm strain relief and thus for a reduction of cable damage due to mechanical stress.

The cable sheath material is flexible and flame retardant, and makes the cable highly resistant to stress. These properties make it ideally suited for applications in industrial and outdoor environments.

Features

- Cat.6A S/FTP 4x2x AWG23/1 OD: 6.0 mm
- Cable sheath material: TPE (thermoplastic elastomer) black
- Ultraflexible and durable cable
- Triple Blade RJ45 plugs with 50µ gold plating
- Connector molding and hood, black
- Cat.6A channel tested (test protocol is included with each cable)
- UL E499958
- Flame retardant
- High temperature insensitivity of the raw cable: Up to +105°C
- Available lenghts: 0.5 to 30 Meter



TTL Network GmbH Weststraße 87 D-33790 Halle Westfalen Tel. +49 5201 7361-10 info@ttl-network.de TTL Network Süd GmbH Ginsheimer Straße 1 D-65462 Ginsheim-Gustavsburg Tel. +49 6134 557557-0/1 www.ttl-network.de

Applications

- Industrial environments
- Conference rooms
- Hospitals, surgeries
- Airports, shopping centers
- Stations, public facilities
- Security systems

Length	ltem Number
0.5 M	1812V-0,5M-UF
1.0 M	1812V-1,0M-UF
2.0 M	1812V-2,0M-UF
3.0 M	1812V-3,0M-UF
5.0 M	1812V-5,0M-UF
7.5 M	1812V-7,5M-UF
10.0 M	1812V-10,0M-UF
15.0 M	1812V-15,0M-UF
20.0 M	1812V-20,0M-UF
25.0 M	1812V-25,0M-UF
30.0 M	1812V-30,0M-UF

HDBaseT[™] Alliance Member