


1 Packing List

Name	Quantity	Name	Quantity
Microphone	1	USB Cable	1
Quick Start	1	-	-

2 Appearance

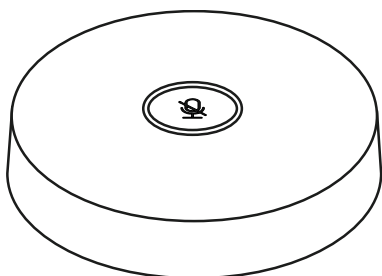

3 Features

Small and Portable

Small and portable USB omnidirectional microphone, small and unique, easy to put in the pocket, carry it with you, easy to travel.

Plug and Play

USB plug and play, connect computer, tablet and video conference terminal, compatible with a variety of systems and software, suitable for daily applications such as video calls.

HD Calls, Clear and Smooth

Intelligent noise reduction, full sound quality, clear calls, anti-interference, high fidelity, conference calls and video conferences are available at any time, and 360° omnidirectional far-field sound pickup.

Sound Pickup, Comfortable Communication


360° omnidirectional pickup, 3m high-quality pickup distance, no longer close to the conference equipment to speak, allowing you to stand and move freely during long calls.

4 Specifications

Meeting Capacity	
Covering Area	15~30m ²
Number of Participants	5~8 person
Microphone	
Excellent Pickup Distance	3m
Frequency Response	100Hz~10kHz
Directivity	360° Omnidirectional
Sensitivity (1kHz)	- 40.5dB (V/Pa)
Signal to Noise Ratio (SNR)	64dBA
Total Harmonic Distortion (THD)	10% (1kHz, 120 dB SPL)
Support Operation System	Windows XP/Vista/7/8/10
Interface & Key	
Interface	1 x USB Interface
Key	1 x Illuminated Mute Key

Physical Parameter	
Power Supply	USB: 5V DC
Dimensions (R x H)	Φ100mm × 20mm
Net Weight	0.15 Kg
Environmental Condition	
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~70°C
Relative Humidity	5%~95% (non-condensing)

5 Application Scenario

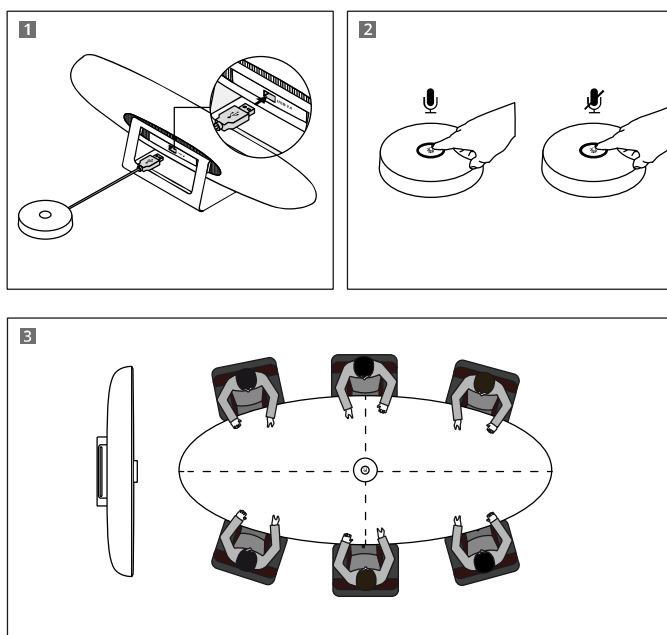

Note The schematic diagram is for reference only, the equipment and connection should be determined according to the actual application scenario.

6 Toxic and Harmful Substances

Part Name	Toxic or harmful substances or elements					
	(Pb)	(Hg)	(Cd)	(CrVI)	(PBB)	(PBDE)
Metal	x	0	0	0	0	0
Plastic	0	0	0	0	0	0
Glass	x	0	0	0	0	0
Circuit board	x	0	0	0	0	0
Power	x	0	0	0	0	0
Attached	x	0	0	0	0	0

This form is compiled in accordance with SJ/T 11364.

0: Indicates that the content of the hazardous substance in all homogenized materials of the component is subject to the limit specified in GB/T 26572.

x: Said the hazardous substance in at least one of the components homogenized material content in excess of the GB/T 26572 limit requirements, and there are no mature alternatives.